

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H01L 33/00		A1	(11) International Publication Number: WO 00/33389
			(43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/US99/28279		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 30 November 1999 (30.11.99)			
(30) Priority Data: 09/203,206 30 November 1998 (30.11.98) US			
(71) Applicant: GENERAL ELECTRIC COMPANY [US/US]; 1 River Road, Schenectady, NY 12345 (US).			
(72) Inventors: LEVINSON, Lionel, Monty; 1 Linda Lane, Niskayuna, NY 12309 (US). SRIVASTAVA, Alok, Mani; 2A4 Sheridan Village, Schenectady, NY 12308 (US).			
(74) Agents: STECKLER, Henry, I. et al.; General Electric Company, 3135 Easton Turnpike W3C, Fairfield, CT 06431 (US).			
		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: LIGHT EMITTING DEVICE WITH PHOSPHOR HAVING HIGH LUMINOUS EFFICACY

(57) Abstract

A lamp comprises a light emitting element such as a light emitting diode or a laser diode which emits blue light, and a phosphor composition which absorbs the blue light having a first spectrum from the light emitting element and emits light having a second spectrum. The phosphor composition comprises at least one of $\text{Ba}_2\text{MgSi}_2\text{O}_7:\text{Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4:\text{Eu}^{2+}$. The invention also relates to a light emitting element which emits blue light, and a phosphor composition which absorbs the blue light from the light emitting element having a first spectrum and emits light having a second spectrum, wherein the spectral luminous efficacy of light emitted by the lamp is at least 550 lumens per watt. The high spectral luminous efficacy of the output spectrum efficiently converts the power input to the lamp into lumens to provide a high brightness. For example the device luminous efficacy of the lamp can be 35-45 lumens output per watt of input electric power or more.

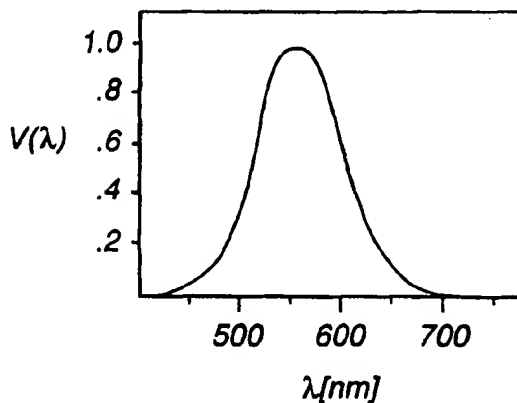

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MT	Mauritius	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

D scription

5

10

15

20

25

30

35

40

45

50

55

LIGHT EMITTING DEVICE WITH PHOSPHOR HAVING HIGH LUMINOUS
EFFICACY

BACKGROUND

Field of the Invention

This invention relates generally to light emitting devices, and more particularly to a lamp which produces white light from a light emitting diode and a phosphor composition.

Description of the Related Art

In recent years, significant improvements have been made in the fabrication of light emitting semiconductor devices which emit radiation in the shorter wavelengths. For example, Nichia Chemical Industries Ltd. in Japan has produced light emitting diodes and laser diodes which emit light in the blue and ultraviolet (UV) wavelengths. Nichia has also produced a light source which includes a blue light emitting diode (LED) and a phosphor. The phosphor, yttrium-aluminum-garnet doped with trivalent cerium, converts a portion of the blue light into a broad yellow emission. The blue and yellow light together produce white light having a color temperature of about 6000-8000° K and a color rendering index (CRI) of about 77.

The Nichia light source, however, has a device luminous efficacy of only about 5 lumens per watt of input electric power. Thus, the luminous flux output by the Nichia lamp is relatively small, particularly if the input electric power is limited, e.g. by battery power. It would be desirable, therefore, to have a light source with a higher device luminous efficacy and luminous flux output for improved performance.

5

SUMMARY

10

5
15

A lamp, according to an exemplary embodiment of the invention, comprises a light emitting element such as a light emitting diode or a laser diode which emits blue light, and a phosphor composition which absorbs the blue light having a first spectrum from the light emitting element and emits light having a second spectrum. The phosphor composition comprises at least one of $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4\text{:Eu}^{2+}$.

20

25

30

10

15

The invention also relates to a light emitting element which emits blue light, and a phosphor composition which absorbs the blue light from the light emitting element having a first spectrum and emits light having a second spectrum, wherein the spectral luminous efficacy of light emitted by the lamp is at least 550 lumens per watt of radiant power. The high spectral luminous efficacy of the output spectrum efficiently converts the power input to the lamp into lumens to provide a high brightness. For example the device luminous efficacy of the lamp can be 35-45 lumens per watt of input electric power or more.

35

20

The lamp is particularly useful as a flashlight where brightness may be an important characteristic of the lamp, input power may be limited, and color rendering is less important.

40

BRIEF DESCRIPTION OF THE DRAWINGS

45

25

Other features and advantages of the invention will be apparent from the following detailed description and the accompanying drawings, in which:

Figure 1 is a graph of spectral luminous efficiency which shows the sensitivity of the human eye to different wavelengths of light;

50

Figure 2 is a diagram which illustrates the relationship between input power, radiant power, and luminous flux for a light source;

55

Figure 3 is a drawing of a typical light emitting diode;

Figure 4 illustrates a lamp which includes a phosphor composition and a light source such as a light emitting diode;

Figure 5 is a graph of the emission spectrum of the phosphor $\text{Ba}_2\text{MgSi}_2\text{O}_7:\text{Eu}^{2+}$;

Figure 6 is a graph of the emission spectrum of the phosphor $\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$; and

Figure 7 is a graph of the emission spectrum of the phosphor $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4:\text{Eu}^{2+}$.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As is known in the art, the human eye is more sensitive to certain wavelengths of light than others. This phenomenon was studied carefully by the Commission International de l'Eclairage (CIE), which created a standard in 1931 known as "the standard observer" based on a large number of observations of the responses of the human eye to light. The standard observer represents the average values of eye sensitivity of a number of individuals as a function of wavelength, and has a maximum value at 555 nanometers (nm), and falls to zero at about 380 nm (ultraviolet) and 780 nm (infrared). The variable sensitivity of the human eye, as represented in the standard observer, is plotted in Figure 1, which shows the spectral luminous efficiency $V(\lambda)$ as a function of wavelength λ .

The spectral luminous efficiency $V(\lambda)$ is important in many lighting applications, because it can have a large effect on the luminous flux, measured in lumens, output by a light source. Luminous flux refers to the time rate of flow of radiant energy (i.e. radiant power) evaluated according to its capacity to produce visual sensation. Radiant power refers to the energy per unit time

radiated by the light source. Luminous flux is different from the radiant power because of the variable sensitivity of the eye to different wavelengths of light. For example, a green light source which emits the same radiant power as red light source will have a higher luminous flux because the eye is more sensitive to green light than to red light. This principle is illustrated in Figure 2, which shows the luminous flux as a function of wavelength produced by a radiant power spectrum which is equal for all visible wavelengths.

The luminous flux L can be calculated by integrating the product of the radiant power $P(\lambda)$ and the luminous efficiency $V(\lambda)$ over the desired wavelength range as follows:

$$k \int P(\lambda) V(\lambda) d\lambda \quad (1)$$

where the coefficient k is the maximum luminous efficacy factor, equal to 683 lumens per watt (lpw) at 555 nm. The maximum luminous efficiency factor k converts watts into lumens.

Another variable which is commonly used in characterizing an output spectrum is the spectral luminous efficacy. The spectral luminous efficacy quantifies the effectiveness of an output spectrum at generating lumens from radiant power. The spectral luminous efficacy is conventionally defined as the luminous flux divided by the radiant power output by a light source. An output spectrum containing only the wavelength 555 nm has the greatest luminous efficacy, i.e. 683 lumens per watt. The spectral luminous efficacy of the visible light emitted by an incandescent bulb is typically about 300 lumens per watt.

According to exemplary embodiments of the invention, the output spectrum of a lamp is designed to provide a high spectral luminous efficacy by

5

10

concentrating the output spectrum around the most sensitive region of the luminous efficiency curve of Figure 1. In this way, the integral of equation (1), which represents the luminous flux output by the light source, is increased without increasing the power input to the light source.

15

20

5 According to exemplary embodiments of the invention, the light source comprises a light emitting device, such as an LED or a laser diode, which emits blue light and a phosphor which absorbs the blue light and emits green light. The phosphor is selected to emit green light having an output spectrum concentrated on the most sensitive region of the luminous efficiency curve of Figure 1.

25

The blue light emitted by the LED typically has an emission peak at a wavelength greater than 400, typically between 400 and 520 nm, more typically between about 450 and about 470 nm. The full width half maximum value of the blue light emitted by the LED is typically less than about 70 nm, more typically less than about 50 nm, optionally less than about 20 nm.

30

35

40

As is known in the art, a blue LED may be manufactured by depositing various layers of semiconductor materials on a substrate. A known group of semiconductor materials which is useful in forming light-emitting devices is the gallium nitride (GaN) system. The gallium nitride system refers to semiconductor materials comprising one or more of the group III nitrides, gallium nitride (GaN), aluminum nitride (AlN), and indium nitride (InN). The GaN system allows various wavelengths of light, particularly the shorter wavelengths, to be produced based on the relative amounts of GaN, AlN, and InN in the composition. The GaN system also typically provides the advantages of a relatively high radiant power output, and a smaller temperature sensitivity, as compared with conventional green emitting LEDs.

45

50

Figure 3 illustrates an example of an LED 10. The exemplary LED includes a substrate 20, an n-type GaN layer 30, a layer 40 of indium gallium nitride (InGaN) which may form a single or multiple quantum well, a p-type

55

5
10
15
20
25
30
35
40
45
50
55

aluminum gallium nitride (AlGaN) layer 50, a p-type GaN layer 60, a positive contact 70, and a negative contact 80. The various semiconductor layers 30, 40, 50, and 60 are typically deposited on one another by chemical vapor deposition (CVD). In general, each layer may comprise $\text{In}_x\text{Ga}_y\text{Al}_{(1-x-y)}\text{N}$, where $0 \leq x \leq 1$ and $0 \leq y \leq 1$. Although an LED is shown in Figure 3 as an example, the invention encompasses other light emitting devices such as laser diodes. In addition, semiconductor materials other than the GaN system can be used, such as gallium arsenide (GaAs) and its alloys, silicon, and silicon carbide (SiC).

10
15
20
25
30
35
40
45
50
55

Other examples of LEDs and laser diodes which emit in the blue wavelengths are known in the art. See, for example, U. S. Patent Nos. 5,813,753; 5,813,752; 5,338,944; 5,416,342; 5,604,763; and 5,644,584. LEDs and laser diodes which emit blue and UV radiation are also described in Shuji Nakamura and Gerhard Fasol, "The Blue Laser Diode" (1997).

15
20
25
30
35
40
45
50
55

Figure 4 illustrates a lighting apparatus according to an exemplary embodiment of the invention. The lighting apparatus 200 includes a light source 210 which may be an LED or a laser diode, for example, powered by leads 212, 214. The light source 210 and a portion of the leads 212, 214 are encapsulated within a transmissive body 220 which may comprise a silicone, glass, or plastic material, for example.

15
20
25
30
35
40
45
50
55

The phosphor composition 230 may be formed on an outer surface of the transmissive body 230, as shown in Figure 4, or directly on the light source 210 within the transmissive body 230. To apply the phosphor composition to the transmissive body 230 or light source 210, the phosphor composition may be added to a liquid suspension medium, such as the nitrocellulose/butyl acetate binder and solvent solution used in commercial lacquers. Many other liquids including water with a suitable dispersant and thickener or binder, such as polyethylene oxide, can be used. The phosphor-containing suspension is painted or coated or otherwise applied on the LED and dried. The lighting apparatus 200 may also include a plurality of scattering particles, such as

titanium dioxide (TiO_2) or aluminum oxide (Al_2O_3) particles, embedded in the transmissive body 230, for example if a laser diode is used as the light source 210.

Upon application of a current to the leads 212, 214, the LED produces a blue light which is converted by the phosphor composition 230 to green light. The blue light emitted by the LED or laser diode can efficiently excite the green-emitting phosphors. According to exemplary embodiments of the invention, one or more of the following phosphors are used: $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4\text{:Eu}^{2+}$.

In the above phosphors, the element following the colon represents an activator. The notation (A,B,C) signifies ($\text{A}_x\text{B}_y\text{C}_z$) where $0 \leq x \leq 1$ and $0 \leq y \leq 1$ and $0 \leq z \leq 1$ and $x+y+z=1$. For example, (Sr,Ca,Ba) signifies ($\text{Sr}_x\text{Ca}_y\text{Ba}_z$) where $0 \leq x \leq 1$ and $0 \leq y \leq 1$ and $0 \leq z \leq 1$ and $x+y+z=1$. Typically, x, y, and z are all nonzero. The notation (A,B) signifies (A_xB_y) where $0 \leq x \leq 1$ and $0 \leq y \leq 1$ and $x+y=1$. Typically, x and y are both nonzero.

The green emitting phosphors preferably have peak emissions between about 500 nm and about 555 nm. Figures 5, 6, and 7 show the emission spectra for the three green phosphors disclosed herein. As shown in the Figures, the emission spectra of the green phosphors coincide to a large extent with the most sensitive region of the spectral luminous efficacy curve of Figure 1. For example, $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$ has a peak emission at about 495-505 nm, typically about 500 nm, $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$ has a peak emission at about 500-510 nm, typically about 505 nm, and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4\text{:Eu}^{2+}$ has a peak emission at about 535-545 nm, typically about 540 nm. The resulting spectral luminous efficacy of the lamp using one or more of these phosphors, assuming substantially all of the blue light is absorbed by the phosphor, is typically greater than 550 lumens per watt of radiant power.

Another variable which is commonly used to describe the effectiveness of a lamp at generating lumens is the device luminous efficacy, defined as the

luminous flux output by the lamp divided by the electric power input to the lamp. The device luminous efficacy of the lamp takes into account the spectral luminous efficacy of the output spectrum as well as three additional factors. First, the device efficiency represents the radiant power output by the LED divided by the electric power input to the LED. For a typical blue LED, the device efficiency is about 10%. Second, the quantum efficiency of the phosphor represents a loss associated with the transfer of energy from the absorbed photons to the emitted photons. The quantum efficiency is defined as the number of photons emitted by the phosphor divided by the number of photons absorbed by the phosphor. For the phosphors described herein, the quantum efficiency is typically about 80%. Third, there is an energy loss associated with the decrease in frequency of the emitted light affected by the phosphor equal to $h\Delta\nu$, where h is Planck's constant and $\Delta\nu$ is the change in frequency of the light. For light absorbed at 450 nm and emitted at 555 nm, the emitted energy is $450/555 = 81\%$ of the absorbed energy.

Taking into account all of these factors, the device luminous efficacy (DLE) for a typical lamp is:

$$\text{DLE} = (\text{DE}) * (\text{QE}) * (\text{FL}) * (\text{SLE})$$

where DE = device efficiency, QE = phosphor quantum efficiency, FL = frequency loss efficiency, and SLE = spectral luminous efficacy. For a typical lamp according to exemplary embodiments of the invention, the device luminous efficacy is $(10\%) * (80\%) * (81\%) * (550 \text{ to } 683 \text{ lumens per watt of radiant power}) = \text{about } 35\text{-}45 \text{ lumens per watt of input electric power}$. This range of device luminous efficacy represents a significant increase over known LED lamps. For example, conventional green-emitting LEDs typically produce no more than 30 lumens per watt (lpw) of input electric power.

5

10

According to another embodiment of the invention, the device luminous efficacy can be increased still further by utilizing a laser diode, which may have a device efficiency of 40%, for example. Assuming the other variables remain substantially the same, the device luminous efficacy is increased to about 143-177 lumens per watt of input electric power.

15

20

10

Using either the LED or the laser diode as a light source, the output light has a spectrum which is concentrated around the most sensitive region of the spectral luminous efficiency curve of Figure 1, producing a high spectral luminous efficacy, e.g. at least 550 lpw. The invention thus provides the advantage of a significantly increased luminous flux output without any increase in the electric power input to the LED or laser diode.

25

30

15

Other embodiments of the invention will be apparent to those skilled in the art from a consideration of this specification or practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with the true scope and spirit of the invention being defined by the following claims.

35

40

45

50

55

Claims

5

10

15

20

25

30

35

40

45

50

55

WHAT IS CLAIMED IS:

1. A lamp comprising:

a light emitting element which emits blue light; and

a phosphor composition which absorbs the blue light having a first spectrum from the light emitting element and emits light having a second spectrum, the phosphor composition comprising at least one of $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4\text{:Eu}^{2+}$.

2. The lamp of claim 1, wherein the light emitting element comprises a light emitting diode.

3. The lamp of claim 1, wherein the light emitting element comprises a laser diode.

4. The lamp of claim 1, wherein the second spectrum has a spectral luminous efficacy of at least 550 lumens per watt of radiant power.

5. The lamp of claim 1, wherein the lamp has a device luminous efficacy of at least 35 lumens per watt of input electric power.

6. The lamp of claim 1, wherein the blue light has an emission peak at a wavelength greater than 400 nm and less than 520 nm.

5

10

7. The lamp of claim 1, wherein the blue light has an emission peak between about 450 nm and about 470 nm.

15

5

8. The lamp of claim 1, wherein the second spectrum has an emission peak between about 500 nm and 570 nm.

20

10

9. The lamp of claim 1, further comprising a transmissive body which encapsulates the light emitting element, wherein the phosphor composition is deposited on a surface of the transmissive body.

25

10. A lamp comprising:

30

a light emitting element which emits blue light; and

15

a phosphor composition which absorbs the blue light from the light emitting element having a first spectrum and emits light having a second spectrum, wherein the spectral luminous efficacy of light emitted by the lamp is at least 550 lumens per watt.

35

40

20

11. The lamp of claim 10, wherein the light emitting element comprises an LED.

45

12. The lamp of claim 10, wherein the lamp has a device luminous efficacy of at least 35 lumens per watt of input electric power.

50

55

5

10

13. The lamp of claim 10, wherein the light emitting element comprises a laser diode.

15

5 14. The lamp of claim 10, wherein the second spectrum has an emission peak between about 535 and 545 nm.

20

15. The lamp of claim 10, wherein the second spectrum has an emission peak between about 495 and 505 nm.

25

10

16. The lamp of claim 10, wherein the second spectrum has an emission peak between about 500 and 510 nm.

30

35

15

17. The lamp of claim 10, wherein the phosphor composition comprises at least one of: $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4\text{:Eu}^{2+}$.

40

18. A lamp comprising:

a light emitting element which emits blue light; and

45

20

a phosphor composition which absorbs the blue light from the light emitting element having a first spectrum and emits light having a second spectrum, wherein the device luminous efficacy of the lamp is at least 35 lumens per watt.

50

55

5
10
19. The lamp of claim 18, wherein the spectral luminous efficacy of light emitted by the lamp is at least 550 lumens per watt.

15
20. A method of producing light comprising the steps of:

5
generating blue light with a light emitting device;
directing the blue light to a phosphor composition which absorbs the blue light, the phosphor composition comprising at least one of: $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$;
20 $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{S}_4\text{:Eu}^{2+}$; and



10
25 converting the blue light with the phosphor composition to light having a different spectrum.

30
21. The method of claim 20, wherein the step of generating blue light comprises generating blue light with a light emitting diode.

15
35 22. The method of claim 21, wherein the phosphor composition converts the blue light to light having a spectral luminous efficacy of at least 550 lumens per watt of radiated power.

40
23. A method of producing light comprising the steps of:

20
45 generating blue light with a light emitting device; and
absorbing the blue light with a phosphor composition which emits light of a different spectrum such that the light emitted by the light emitting device and phosphor composition together has a spectral luminous efficacy of at least 550
50 lumens per watt of radiated power.

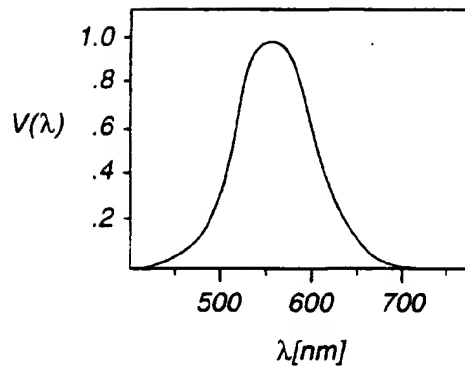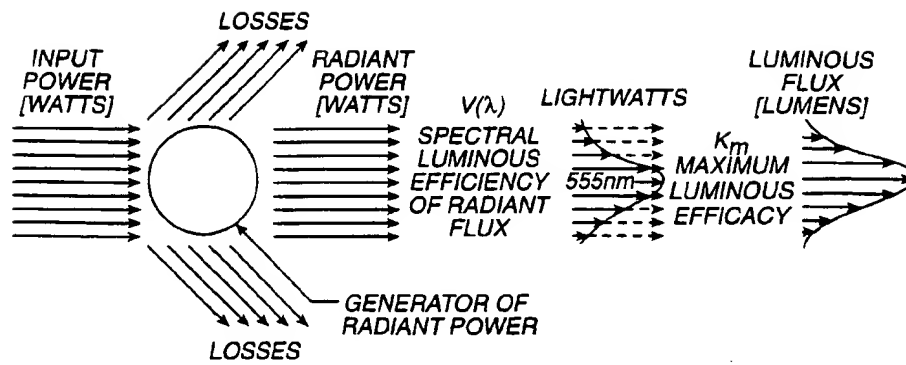FIG. 1**FIG. 2**

2/3

FIG. 3





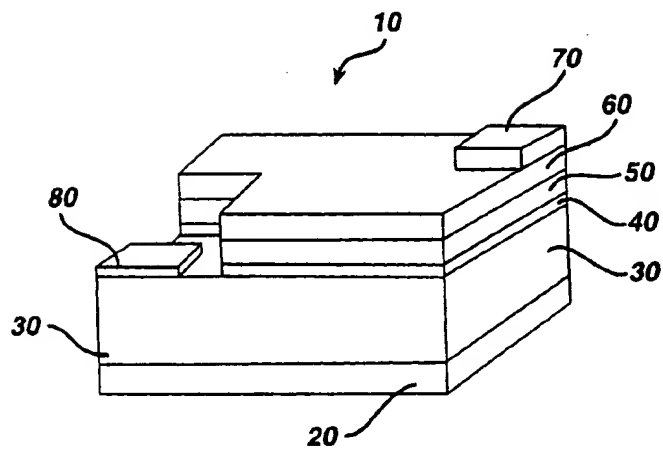


FIG. 4

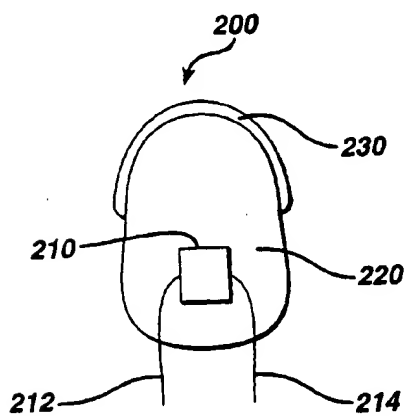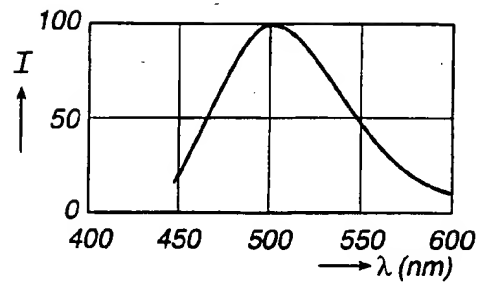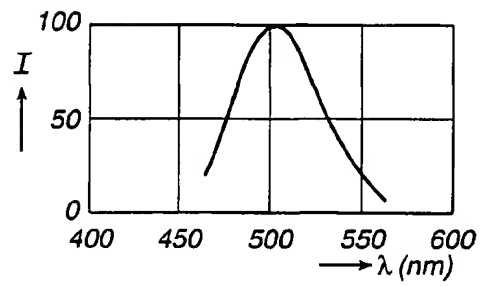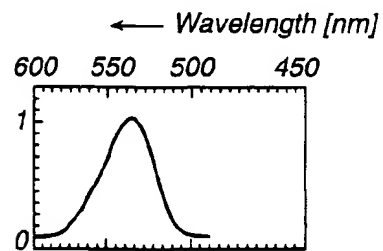

3/3

FIG. 5**FIG. 6****FIG. 7**

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/28279

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01L33/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 640 792 A (SMITH STEPHEN T ET AL) 24 June 1997 (1997-06-24) abstract; figures	1,2, 4-12, 14-16, 18-23
A	WO 98 19290 A (TEWS HELMUT ;AVERBECK ROBERT (DE); SIEMENS AG (DE)) 7 May 1998 (1998-05-07) page 3, line 8 -page 4, line 4	1-3,6,7, 10,11, 13,17, 18,20, 21,23
A	DE 196 38 667 A (SIEMENS AG) 2 April 1998 (1998-04-02) claims 1,4	1-3,6,7, 9-11,13, 17,18, 20,21,23

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubt on priority claim(s) or which is cited to establish the published on date of another citation or other special reason (see specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

3 April 2000

Date of mailing of the international search report

10/04/2000

Name and mailing address of the ISA
European Patent Office, P.O. Box 1
NL - 2280 HV Rijswijk
Tel.: (+31-70) 340-2040, Tlx. 31 651 epo nl
Fax: (+31-70) 340-3010

Authorized officer

De Laere, A

INTERNATIONAL SEARCH REPORT

Int. Appl. No.
PCT/US 99/28279

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	POORT S H M ET AL: "Optical properties of Eu-activated orthosilicates and orthophosphates" JOURNAL OF ALLOYS AND COMPOUNDS, CH, ELSEVIER SEQUOIA, LAUSANNE, vol. 260, no. 1, 12 September 1997 (1997-09-12), pages 93-97, XP004094706 ISSN: 0925-8388 figure 1	1,8,10, 15-17,20
A	LE THI K T ET AL: "INVESTIGATION OF THE MS-AL2S3 SYSTEMS (M=CA, SR, BA) AND LUMINESCENCE PROPERTIES OF EUROPIUM-DOPED THIOALUMINATES" MATERIALS SCIENCE AND ENGINEERING B, CH, ELSEVIER SEQUOIA, LAUSANNE, vol. 814, no. 4, 1 September 1992 (1992-09-01), pages 393-397, XP000359265 ISSN: 0921-5107 figures	1,8,10, 15,17,20
A	GB 1 299 608 A (GTE SYLVANIA INCORPORATED) 13 December 1972 (1972-12-13) table 1	1,8,10, 16,17,20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 99/28279

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5640792 A	24-06-1997	CA 2162236 A,C	08-12-1996
WO 9819290 A	07-05-1998	DE 19645035 C	30-04-1998
		CN 1212069 A	24-03-1999
		EP 0873557 A	28-10-1998
		US 5994722 A	30-11-1999
DE 19638667 A	02-04-1998	BR 9706787 A	13-04-1999
		BR 9709998 A	10-08-1999
		CN 1228873 A	15-09-1999
		WO 9750132 A	31-12-1997
		WO 9812757 A	26-03-1998
		EP 0862794 A	09-09-1998
		EP 0907969 A	14-04-1999
		JP 11500584 T	12-01-1999
GB 1299608 A	13-12-1972	NONE	

[about wiley](#) [products](#) [to order](#) [what's new](#) [authors](#) [search](#) 

Directory

[■ contact us](#)

Corporate Locations



North America

United States corporate headquarters and main editorial offices

John Wiley & Sons, Inc.

605 Third Avenue

New York, NY 10158-0012

Telephone: (212) 850-6000

Fax: (212) 850-6088

Email: info@wiley.com

Wiley Customer Service Center

1 Wiley Drive

Somerset, NJ 08875-1272

Telephone: (732) 469-4400

Fax: (732) 302-2300

Returns Center

Heller Park Center

360 Mill Road

Edison, NJ 08817

Telephone: (732) 650-4600

Fax: (732) 650-4619

Jossey-Bass

A John Wiley & Sons Company

350 Sansome Street

San Francisco, CA 94104

Telephone: (415) 433-1740

Fax: (415) 433-0499

Canada

John Wiley & Sons Canada Ltd.

22 Worcester Road

Etobicoke, Ontario M9W 1L1

Telephone: (416) 236-4433

Fax: (416) 236-4447

Email: canada@wiley.com

Europe

Wiley Europe Ltd.

Main Offices

Baffins Lane, Chichester

West Sussex PO 19 1UD

England

Telephone: 44 01243 779 777

Fax: 44 1 243-775878
Email: customer@wiley.co.uk

WILEY-VCH Verlag GmbH

Pappelallee 3
69469 Weinheim
Germany
Telephone: 49 6201 6060
Fax: 49 6201 606328
Email: info@wiley-vch.de

Asia

John Wiley & Sons (Asia) Pte. Ltd.
2 Clementi Loop #02-01
Singapore 129809
Telephone: 65 463 2400
Fax: 65 463 4605, 65 463 4604
Email: wiley@singnet.com.sg

Australia

John Wiley & Sons Australia, Ltd.
Main Office
33 Park Road
Milton, Queensland 4064
Australia
Telephone: 61 7-3859 9755
Fax: 61 7-3859 9715
Email: Cust_Service@johnwiley.com.au

Corporate Officers Bradford Wiley II, Chairman

William J. Pesce, President, Chief Executive Officer

Robert D. Wilder, Executive Vice President, Chief
Financial and Support Operations Officer

Stephen A. Kippur, Executive Vice President and
President, Professional & Trade Publishing

William J. Arlington, Senior Vice President, Human
Resources

Peter W. Clifford, Senior Vice President, Finance;
Corporate Controller and Chief Accounting Officer

Timothy B. King, Senior Vice President, Planning
and Development

Richard S. Rudick, Senior Vice President, General
Counsel

Deborah E. Wiley, Senior Vice President, Corporate



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: H01L 33/00	A1	(11) International Publication Number: WO 00/33389
		(43) International Publication Date: 08 June 2000 (08.06.2000)

(21) International Application Number: PCT/US99/28279

(22) International Filing Date: 30 November 1999 (30.11.1999)

(30) Priority Data:
09/203,206 30 November 1998 (30.11.1998) US(60) Parent Application or Grant
GENERAL ELECTRIC COMPANY [/]; O. LEVINSON,
Lionel, Monty [/]; O. SRIVASTAVA, Alok, Mani [/];
O. STECKLER, Henry, I. : O.

Published

(54) Title: LIGHT EMITTING DEVICE WITH PHOSPHOR HAVING HIGH LUMINOUS EFFICACY

(54) Titre: DISPOSITIF ELECTROLUMINESCENT AVEC PHOSPHORE A RENDEMENT LUMINEUX ELEVE

(57) Abstract

A lamp comprises a light emitting element such as a light emitting diode or a laser diode which emits blue light, and a phosphor composition which absorbs the blue light having a first spectrum from the light emitting element and emits light having a second spectrum. The phosphor composition comprises at least one of $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; and $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{Si}_2\text{O}_7\text{:Eu}^{2+}$. The invention also relates to a light emitting element which emits blue light, and a phosphor composition which absorbs the blue light from the light emitting element having a first spectrum and emits light having a second spectrum, wherein the spectral luminous efficacy of light emitted by the lamp is at least 550 lumens per watt. The high spectral luminous efficacy of the output spectrum efficiently converts the power input to the lamp into lumens to provide a high brightness. For example the device luminous efficacy of the lamp can be 35-45 lumens output per watt of input electric power or more.

(57) Abrégé

L'invention concerne une lampe comprenant un élément électroluminescent, par exemple une diode électroluminescente ou laser, qui émet de la lumière bleue, ainsi qu'une composition au phosphore qui absorbe la lumière bleue présentant un premier spectre provenant de l'élément électroluminescent et émet une lumière présentant un second spectre. La composition au phosphore comprend au moins un des composés suivants: $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; et $(\text{Sr,Ca,Ba})(\text{Al,Ga})_2\text{Si}_2\text{O}_7\text{:Eu}^{2+}$. L'invention concerne également un élément électroluminescent qui émet de la lumière bleue, ainsi qu'une composition au phosphore qui absorbe la lumière bleue provenant dudit élément présentant un premier spectre et émet une lumière présentant un second spectre, le rendement lumineux spectral de la lumière émise par la lampe étant d'au moins 550 lumens par watt. Le rendement lumineux spectral élevé du spectre de sortie convertit efficacement l'énergie alimentant la lampe en lumens afin de produire une luminosité élevée. Par exemple, le rendement lumineux de dispositif de la lampe peut être égal ou supérieur à 35-45 lumens par watt d'énergie électrique d'entrée.